



Victor V1.1 Video Production Cart (VCTR-V1)

Assembly Manual



Available Size - 32", 36",42",48"


All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

What's In The Box

2

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.

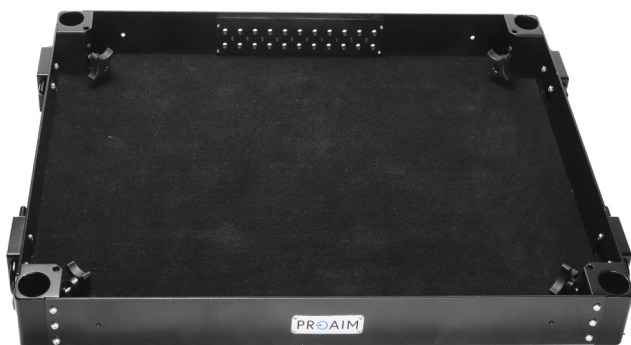

1 x Top Shelf



1 x Lower Shelf



2 x Cross Bar



2 x Hinge Handle



1 x Carrying Handles



1 x L- Type Allen key(4mm)



4 x Screws



2 x Connectors



2 x Spring locks



2 x Pneumatic Wheels (without Brake)
+ 2 Pouches



2 x Pneumatic Wheels (with Brake)
+ 2 Pouches



4 x Support Rods + 4 Pouches

INDEX

Sr. No	Particulars	Page No.
1	Pneumatic Wheels Installation	4
2	Rod Installation	5
3	Connector Installation	5
4	Carrying Handle Installation	6
5	Upper Shelf Installation	6
6	Spring lock Installation	7
7	Cross Bar Installation	8
8	Hinge Handle Installation	8
9	Final Assembly	9

Video Production Cart Setup

- Unlock all safety locks.
- Separate the top shelf from the bottom shelf to begin assembly.



Pneumatic Wheels Installation

Wheels without Brake

- Flip the knob to unlock the wheel.



- Slide the wheel onto the bracket on the bottom shelf.




Wheels with Brake

- Flip the knob to unlock the wheel.



- Slide the wheel onto the bracket on the bottom shelf.


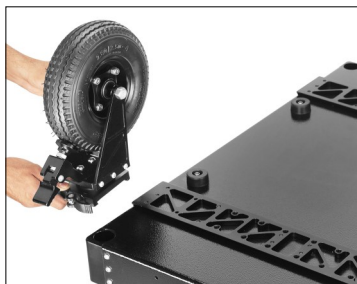


- The cart is shown here fully assembled with both braked and non-braked wheels attached.




Rod Installation

- Loosen the four knobs on the corners of the bottom shelf. Insert rods into each corner slot.
- Tighten all knobs firmly to secure the structure.
- The rods are securely attached to the cart as shown in the image.

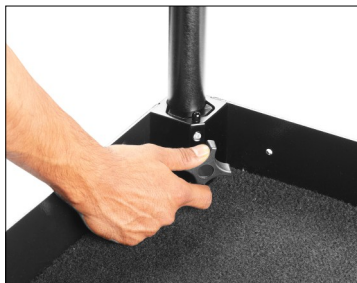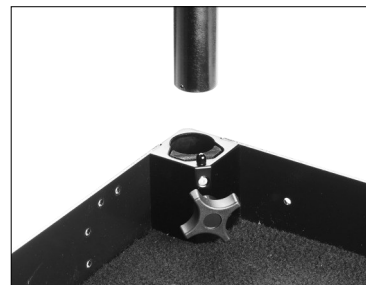


Connector Installation

- Loosen the both screw of the connector using the (L-Type 4mm) Allen Key as shown.
- Place the connector on the side of the bottom shelf as shown in the image.
- Align it properly with the mounting holes on the lower shelf.
- Secure the spring lock by tightening the screws using the Allen key.

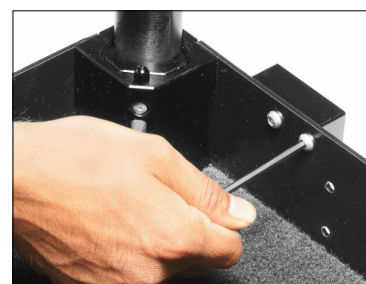

- Finally, the connectors have been installed, as shown in the image.

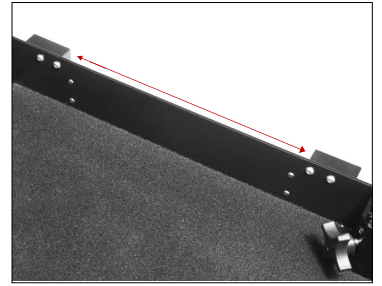


Carrying Handle Installation


- Loosen the screws on the carrying handle with the (L-type 4mm) Allen key before mounting.



- Repeat the same steps to remove all screws before attaching it to the bottom shelf.

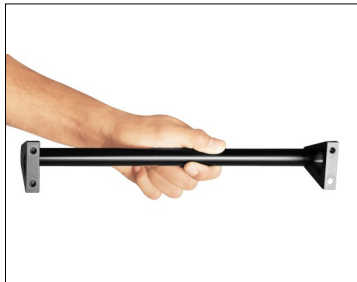

- Align the handle with the bottom shelf
- Secure the handle to the bottom shelf by tightening the screws with the (L-Type 4mm) Allen key.

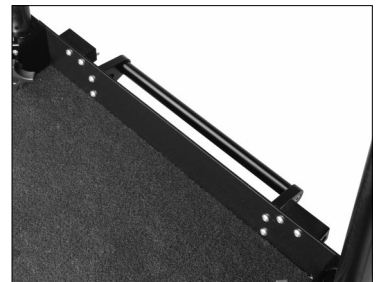

- Finally, the carrying handle have been installed, as shown in the image.



Upper Shelf Installation

- Mount the upper shelf on top of the rods by aligning it with the corner positions.



- Tighten all four corner knobs securely to prevent the upper shelf from loosening or falling.



- Once all knobs are properly installed and tightened, the cart assembly is complete and ready for use.



Spring lock Installation

- Loosen the spring lock screws using the (L-type 4mm) Allen key, as shown in the images.




- Position the spring lock on the side of the top shelf.



- Align it properly with the designated mounting points.
- Secure the spring lock by tightening the screws using the Allen key (L-type 4mm) .




- Finally, the spring lock have been installed, as shown in the image.

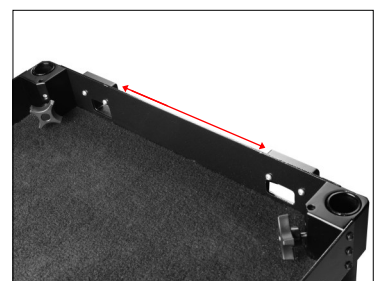

Cross Bar Installation

- Loosen the knobs to open the crossbar clamps.

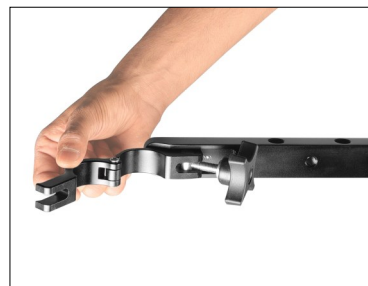

- Place the clamps onto the rods, as shown in the image.



- Tighten the knobs securely to fix the crossbar firmly in position.



Hinge Handle Installation

- Open the hinge handle clamp.



- Align the clamp properly around the rod to ensure a secure fit.



- Securely fasten the hinge handle onto the cart rod.



- The hinge handles have already been installed on both sides, as shown in the image.

YOUR PROAIM VICTOR V1.1 VIDEO PRODUCTION CAMERA CART

ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.